



Fuel LOADING SKIDS



Iberfluid Instruments
Botànica, 122
08908 L'Hospitalet de Llobregat.
Tel. +34 93 333 36 00
Fax. +34 93 334 05 24

www.iberfluid.com

Fuel LOADING SKIDS



General Specifications:

From 1 to 5 charging points

According to directives:

- PED (dir. 97/23/CE)
- ATEX (dir. 94/9/CE)

Blending systems

Modular additives systems

Loading arms with compensators

Compact structures with surfaces finishes depending on the application needs.


Equipment included:

- Counters with filter degasser EExd
- Head electronic operator interface
- Arms vapour recovery
- Position detection systems loading arm and vapour recovery
- Smart card reader
- System grounding and overfill
- Sight inspection




Design, Installation and Commissioning of the system:

- Adaptation of layout as designs
- Installation and assembly of the complete system

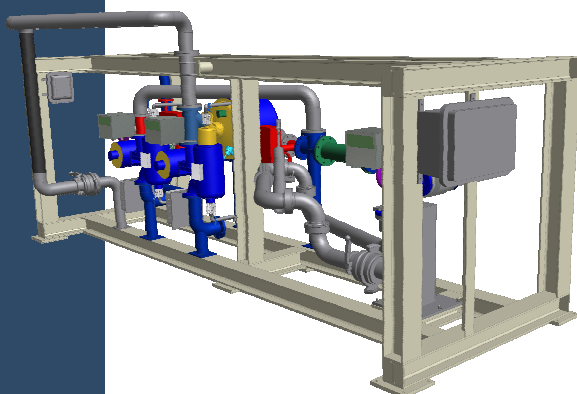

DIMENSIONS

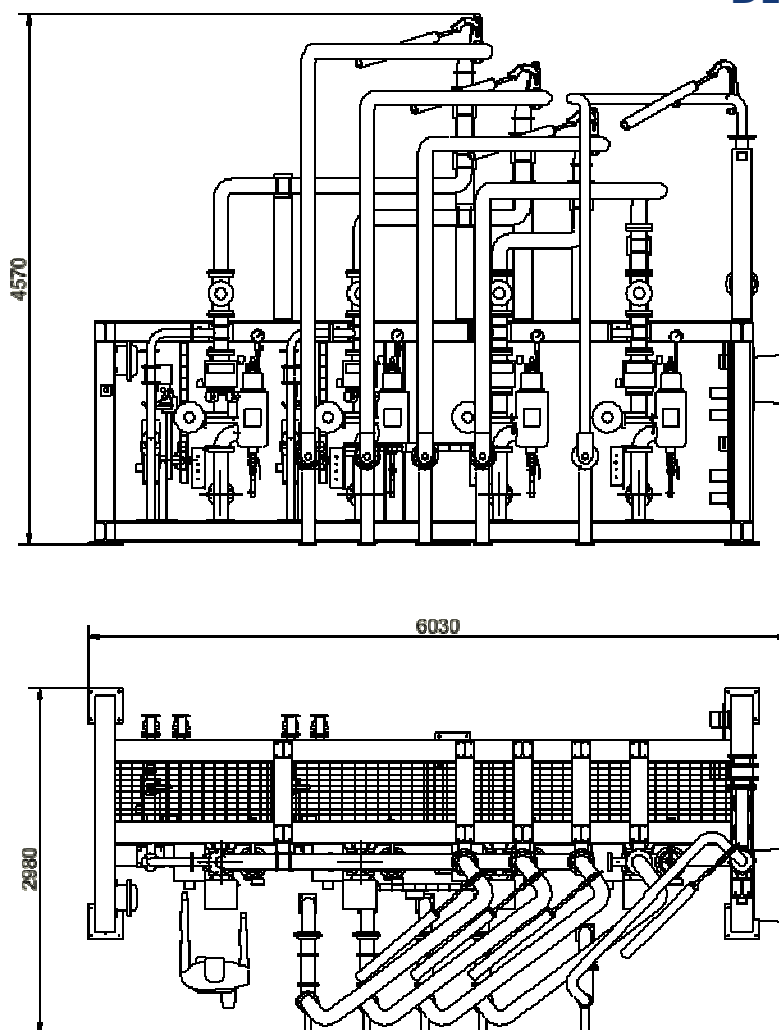

4 loading arms + vapor recovery skid general dimensions.

Reference	LOADING SKIDS
Main fluids	Fuel Oil / Diesel
Secondary fluids	FAME / VHO
Additives	B + C ...
Flow (10 cStk)	200 to 2.200l/min
Working Pressure	10 bar
Temperature	-10 to + 50°C
Arm connections	From 4" to 6" API / GUILLEMIN (or according to customers specifications)
Brands components	ISOIL, HONEYWELL, RMG, LIQUIP, Masoneilan