


CSI's **S_xSample™** ensures safer sampling from Sulfur Recovery Unit rundown and transfer lines.

BENEFITS


- ◆ **Constant Volume Sampling:** Each sample is approximately 7 in³ (115 mL).
- ◆ **No free path to atmosphere:** Sample style plug valve prevents process from having free path to atmosphere - promoting safety by preventing potential for operator exposure.

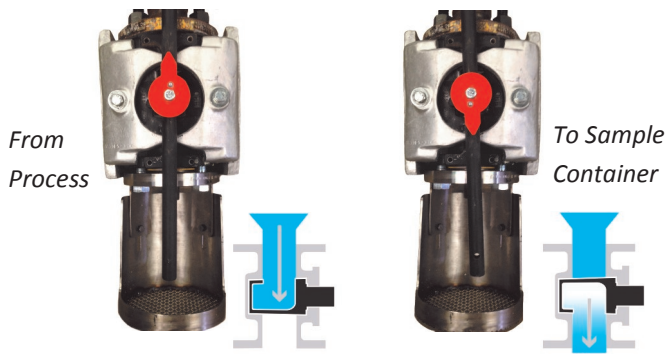

(Illustration Credit: Tuffline Sleeved Plug Valves™, Xomox Process Valves & Actuators)

STANDARD FEATURES

- ◆ Carbon steel valve body with stainless steel sample container holding basket.
- ◆ Fully jacketed with **CSI CONTROHEAT®** bolt on steam jacket.
- ◆ Only requires 2" NPS 150# flange connection to process.
- ◆ Adjustable holding basket accepts containers up to 6" diameter x 6" tall.

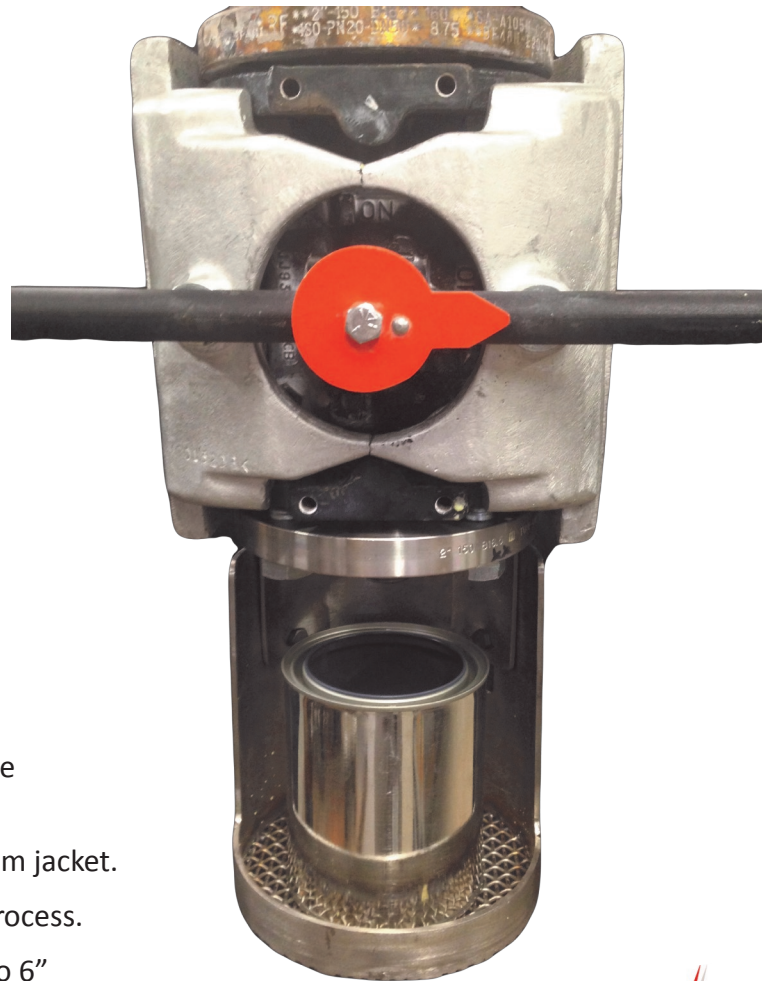

The **S_xSample™** is backed by **CSI's** engineering expertise, expansive production capacity, and exemplary customer service. **CSI's S_xSample™** delivers the technical and commercial value you've come to expect from CSI for over 50 years.